



C O M M A N D E R  
**XPERTS**  
☎ 8 7 7 - 2 2 4 - 1 5 3 8

## QUICK START GUIDE

---



**CALL**



**MAKE  
APPOINTMENT**



**CONNECTED**



# QUICK START GUIDE


This guide illustrates how to set-up and connect your Mosquito Magnet® Commander trap to the internet.

**Before you begin, be sure to:**


- Assemble the trap, including the antenna
- Fully charge the battery overnight

## STEP 1:


### Install the Wireless Access Point (WAP):

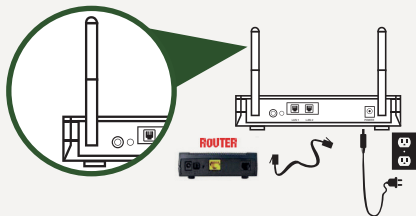

1.1 - Assemble WAP antennas.

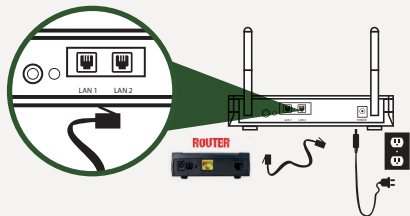


1.2 - Connect the network cable from the WAP to your router using either LAN1 or LAN2.

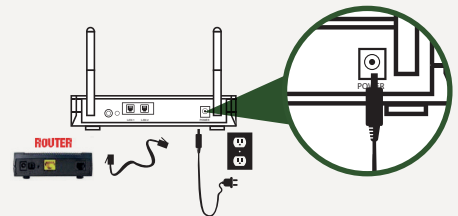

1.3 - Connect the WAP's power cord into an outlet.

## STEP 2:

### Connect your trap and place in yard.



2.1 - Plug in your Commander trap's battery. The trap will automatically connect to the Wireless Access Point. The trap will display a series of numbers for up to a minute. After 1 minute, no numbers should show.




2.3 - Connect a full 20 lb. propane tank.



2.2 - Place your trap upwind in between mosquito breeding areas (standing water, bushes) and people areas (patio, deck) making sure it's at least 30-40 feet away from human activity and no more than 250 ft. away from the WAP.

Visit [www.mosquitomagnet.com](http://www.mosquitomagnet.com) for details on trap placement.

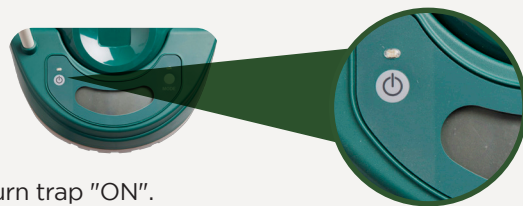

2.4 - Turn trap "ON".



**Note:** If the trap's LCD screen displays a Service Error Code (2-digit number) for longer than 2 minutes, refer to the back of this guide for trouble-shooting steps.

## STEP 3:

### Register your trap

**3.1** - Go to your internet browser & visit [www.mosquitomagnet.com/product-registration](http://www.mosquitomagnet.com/product-registration) to register your trap using the serial number on the trap and the MAC address located on the outside of the Commander trap box or underneath the trap's handle.

**3.2** - Create an account if you have not already done so. Make sure to use the same email address for your product registration and My Account information.

Full instructions available at [www.mosquitomagnet.com/Commander-Manual](http://www.mosquitomagnet.com/Commander-Manual)



Trap Display	Trap Status	Action Required
1	Bag Half Full	1. Check to make sure you have a replacement net.
2	Bag Full	1. Replace with new net.
3	Knocked Over	1. Reposition trap properly. 2. Unplug & plug-in battery.
4	Theft Alert	3. Turn trap back ON.
5	5 Days of Gas Left	1. Replace with full tank and/or press and hold mode button on trap to select Gas Saver Mode.
6	Tank Empty	2. Reset Tank Status in the Control Panel on the web interface.
7	Plume Thermister Error	1. Contact Customer Care at <b>1.877.224.1538</b> .
Blinking 91, 92, 93, 95	Trap is connecting	None, no numbers should show after a minute.
91	Computer cannot connect to trap	1. Automatic wireless set-up failed. <b>Visit <a href="http://support.mosquitomagnet.com/help">support.mosquitomagnet.com/help</a> or call 1.877.224.1538</b>
92		
93		
94		
95		
Flashing COOL with Thermometer Icon	Low Ambient Temperature	1. Reset trap on web interface. 2. Trap will automatically restart when ambient temperature rises above selected temperature.